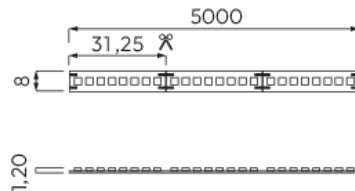


## STRIP BLACK 224LED/M 10W/M 30K IP20

Code: 06865

The Black stripLED Professional line is the best choice in terms of performance, efficiency and light quality. These strips are characterized by a uniform color and high color rendering, brilliant and sharp in every context. CRI95, R9>60.



### General specifications

Commercial brand	<b>Black professional</b>
Installation environment	<b>Interior</b>
Included mounting type	<b>3M 300 LSE biadhesive</b>
Cable output type	<b>IN/OUT</b>
Packaging	<b>Box</b>
Made in	<b>Albania</b>

### Physical specifications

IP	<b>IP20</b>
----	-------------


### Lighting specifications

N° LEDs / m	<b>224</b>
Lm / m	<b>1427</b>
W / m	<b>10</b>
Light type	<b>White</b>
CCT	<b>3000K</b>
CRI	<b>95</b>
R9	<b>60</b>
Chromatic tolerance (SDCM)	<b>3</b>
RG	<b>RG1</b>
Life time	<b>L90B10</b>
LB value @ h	<b>50000</b>

## Light Emission Specifications

Beam (°)	120
----------	-----

## Electrical specifications

Power supply availability	Not included
Dimmable	Yes
Dimmer availability	Not included
Power (W)	50
Power supply voltage type	DC
Power supply type (CC / CV)	Voltage
Input Voltage MIN-MAX (V)	24
Insulation class	III
Light source type	LEDs SMD
LED packaging	2835
Feedback (mm)	5000
Energy efficiency class	


## Dimensions and weight

Length (mm)	4988
Width (mm)	8
Height / Thickness (mm)	1.2
Cable IN length (mm)	100
Cable OUT length (mm)	100
Minimum bending radius (m)	5
Module length (mm)	31.25


## General conditions

Warranty	5 years
Operating temperature (ambient)	-10 °C (min) / 45 °C (max)
Storage temperature	-20 °C (min) / 50 °C (max)

## Accessory codes


**14664**

Linear connectors to connect two LED strips with 8mm width (10pcs kit)

**14667**

Corner connectors for connecting two LED strips with width 10mm at 90° (Kit 10pz)

---

**14679**

Connectors with red/black cable of 500mm for electrify LED strip with width 8mm (Kit 10pz)

---