


STRIP BLACK 224LED/M 16,5W/M 40K IP65

Code: 06887

The Black stripLED Professional line is the best choice in terms of performance, efficiency and light quality. These strips are characterized by a uniform color and high color rendering, brilliant and sharp in every context. CRI95, R9>60.

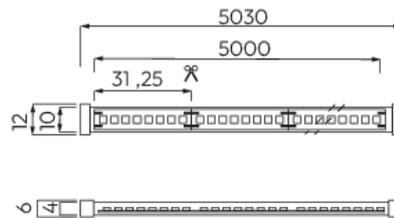

General specifications

Commercial brand	Black professional
Installation environment	Interior, Exterior
Included mounting type	3M 300 LSE biadhesive
Cable output type	IN/OUT
Packaging	Box
Made in	Albania

Physical specifications

IP	IP65
----	-------------

Lighting specifications

N° LEDs / m	224
Lm / m	2471
W / m	16.5
Light type	White
CCT	4000K
CRI	95
R9	60
Chromatic tolerance (SDCM)	3
RG	RG1
Life time	L90B10
LB value @ h	50000

Light Emission Specifications

Beam (°)	120
----------	-----

Electrical specifications

Power supply availability	Not included
Dimmable	Yes
Dimmer availability	Not included
Power (W)	82.5
Power supply voltage type	DC
Power supply type (CC / CV)	Voltage
Input Voltage MIN-MAX (V)	24
Insulation class	III
Light source type	LEDs SMD
LED packaging	2835
Feedback (mm)	5000
Energy efficiency class	
Replaceable light source	Replaceable by skilled personnel


Dimensions and weight

Length (mm)	4988
Width (mm)	10
Height / Thickness (mm)	4
Cable IN length (mm)	100
Cable OUT length (mm)	100
Minimum bending radius (m)	5
Module length (mm)	31.25


General conditions

Warranty	2 years
Operating temperature (ambient)	-10°C (min) / 45°C (max)
Storage temperature	-20°C (min) / 50°C (max)

Accessory codes



05187
Closed cap for silicone sheathing 9528



05188

Cable entry cap for silicone sheathing 9528
