
IVEL ^.

BALTI 220 SINGLE-LIGHT 37W 3000K CRI85

Code: 119604

Balti 220 is an outodoor wall-mounted luminaire, available in mono and bi-directional version, and designed to be equipped with COB LEDs of last generation, with passive heat dissipation. It ensures a wide lighting of the wall or of the ceiling and of the floor, with a high luminous quality. Two bi-directional versions are available on request, with light blade or 44° beam. The fittings have a very compact and shallow profile: this is ideal for applications in domestic and residential areas such as passageways, terraces and façades. Cable-gland in nickel brass, high protection rating IP66. Thanks to their versatility and elegance, Balti 220 can be installed in indoor applications, too.

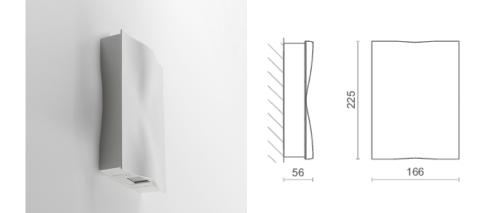

General specifications

Designer	Ivela Design Team
Installation environment	Exterior
Native mounting type	Surface mounted
Made in	Italy

Physical specifications

White
White
Fixed
No
IP66
No
IK09
No

Lighting specifications

Lumen	4005
Nominal Lumen (Im)	5200
Luminous efficacy (Im / W)	0

IVEL ^.

Light type	White
ССТ	3000K
CRI	85
Life time	L80B10
LB value @ h	50000

Electrical specifications

Power supply availability	Included
Power supply position	Internal
Control type	ON/OFF
Power (W)	37
Power supply type (CC / CV)	Voltage
Input Voltage MIN-MAX (V)	230
Frequency (Hz)	50-60
Insulation class	I
Light source type	LED COB

Dimensions and weight

Length (mm)	56
Width (mm)	166
Height / Thickness (mm)	225

General conditions

Beam (°)

100