


35 LINEAR CONTINUOUS ELEMENT 500MM 4000K

Code: 458-230059A-1262

The Continuous element of 35 Linear is made of an aluminium linear element with opal polycarbonate diffusers. It is supplied with one straight joint for electrical continuity. Double switch: 120° (up) - 240° (down). Maximum load capacity: 200W. Master linear element and transformers should be ordered separately.

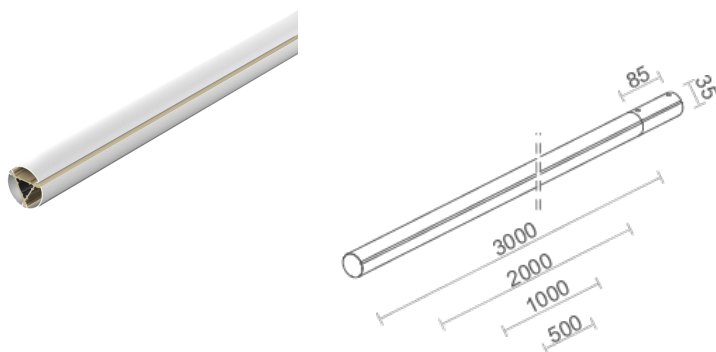

General specifications

Designer	Ivela Design Team
Product type	Linear lamp
Installation environment	Interior
Native mounting type	Suspension, Surface mounted
Mounting type	Suspension
Ideal application locations	Hospitality, Showroom, Museum, Office, Commercial space
Junction shape	Lineare
Customizable	Yes
Made in	Italy

Physical specifications

Body material	Aluminum
Body finish	Anodized
Body color	Black
Cap material	Aluminium
Roadway	No
Walkover	No
Covering with insulating materials	No
IP	IP20
Resin sealing	No
Waterstop	No
Salt mist resistance	No

Lighting specifications

N° of light sources	3
Power	15
W source	5
W source 2	10
Light type	White
CCT	4000K
CCT	4000K
CRI	90

Optical specifications

Emission type	Biemission
Light emission side	Bottom
Optics type	Flat diffuser
Optical diffuser finish	Opal
Optical diffuser material	Polycarbonate
Orientability	Fixed

Electrical specifications

Ignition type	Dual switch
Dimmable	Yes
Dimming type	ON/OFF
Power supply voltage type	DC
Power supply type	Voltage
Input Voltage (V)	48
Insulation class	III
Replaceable light source	Replaceable by skilled personnel

Dimensions and weight

Length (mm)	500
Diameter (mm)	35