


35 TRACK - 2000MM

Code: 6447-20-1262

35 Linear has different types of light: indirect diffused uplight, direct diffused downlight. 35 Linear profile is a cylindrical element that can create diffused uplight and/or diffused downlight. Using these modular elements, the 35 system can be configured to shape the light as required. 35 Linear system can be connected to 35 Track for specific compositions where also accent light is needed. 35 Linear master element comes with two straight joints and diffusers in opal polycarbonate.

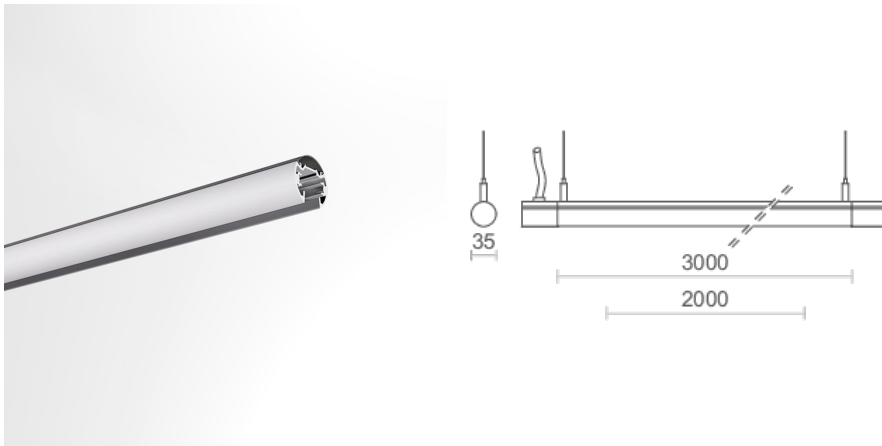

General specifications

Designer	Ivela Design Team
Installation environment	Interior
Native mounting type	Suspension
Mounting type	Suspension
Ideal application locations	Residential, Commercial, Hospitality, Retail, Uffici, Showroom
Customizable	No
Container product	No
Made in	Italy

Physical specifications

Shape	Round
Body material	Aluminum
Body finish	Powder-coated
Body color	Black
Frontal color palette code	RAL 9005
Roadway	No
Walkover	No
Covering with insulating materials	No
IP	IP20
Resin sealing	No

Waterstop	No
Salt mist resistance	No

Optical specifications

Emission type	Biemission
---------------	------------

Electrical specifications

Ignition type	Dual switch
Dimmable	Yes
Dimmer availability	Not included
Dimming type	ON/OFF
Power supply voltage type	DC
Power supply type	Voltage
Input Voltage (V)	48
Nominal current (mA)	15
Insulation class	III
Load on phases (mA)	15
Number of groups / phases	2

Dimensions and weight

Length (mm)	2000
Diameter (mm)	35