


MINIROOLER-IN 15 LIGHTS

Code: 273-019BRN-21

Fixed miniaturized linear downlight, featuring 15 high-efficiency LEDs of the latest generation with PMMA lens. Minirooler-IN 15 lights grants high lighting performance, low glare levels and homogeneous light distribution. This downlight can be used for a highly versatile and performing use of the light, and for a greatest freedom of application in residential, contract, hospitality spaces and offices.

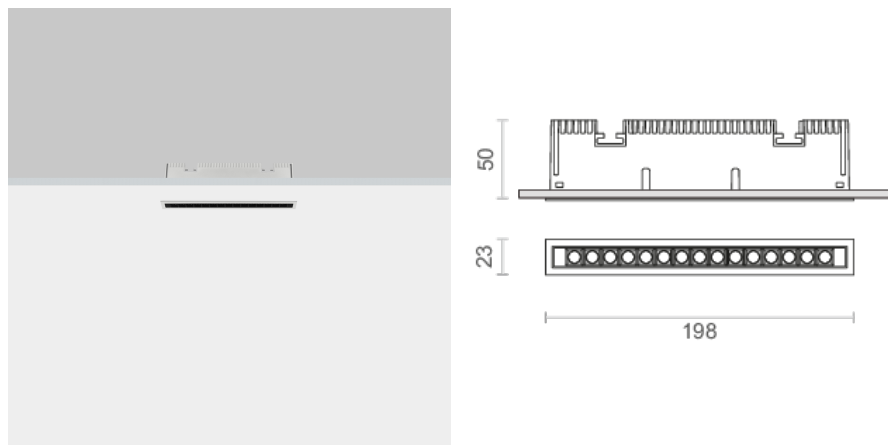

General specifications

Designer	Alessandro Pedretti
Installation environment	Interior
Native mounting type	Rebated flush-mounted
Mounting location	Ceiling
Packaging	Box
Made in	Italy

Physical specifications

Body material	Aluminum
Body finish	Glossy
Body color	White
Frontal finish	Glossy
Frontal color	Black
Orientability	Fixed
Suitable for insulating materials	No
IP	IP40
Waterstop	No
Salt mist resistance	No

Lighting specifications

Lumen	1440
-------	------

L.O.R. (%)	81
Light type	White
CCT	3000K
CRI	90
Chromatic tolerance (SDCM)	3
Life time	L80B10
N° LEDs / modulo	15

Light Emission Specifications

Light beam distribution	Asymmetric
Optics / diffuser / reflector type	Asymmetric optical lens
Optical / diffuser / reflector material	PMMA
Optical finish / diffuser / reflector	Semi-trasparent
Beam (°)	14
β (°)	41

Electrical specifications

Power supply availability	Not included
Power supply position	Remote
Dimmer position	Remote
Power (W)	17.5
Power supply type (CC / CV)	Current
Insulation class	III

Dimensions and weight

Length (mm)	198
Width (mm)	23
Height / Thickness (mm)	50
Recess length (mm)	194
Recess width (mm)	19
Recess depth (mm)	50

General conditions

Warranty	5 years
----------	---------