


TORI L

Code: 286-019BZN-16

Adjustable trim recessed spotlight. Small size with great performance. Tori offers maximum adjustability with an inclination of up to 65°, rotation of 355° and internal adjustment of 25°, guaranteeing precise and flexible lighting. Available in recessed, trimless and dual versions, it adapts to every design requirement with elegance and discretion.

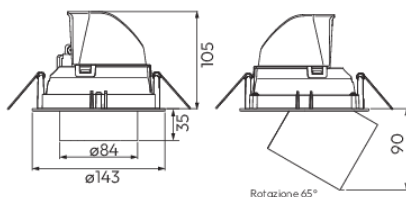

General specifications

Designer	Ivela Design Team
Installation environment	Interior
Native mounting type	Rebated flush-mounted
Mounting location	Ceiling
Packaging	Box
Made in	Italy

Physical specifications

Body material	Aluminum
Body finish	Embossed
Body color	Black
Orientability	Adjustable, Oscillating
Suitable for insulating materials	No
IP	IP20
Waterstop	No
Salt mist resistance	No

Lighting specifications

Lumen	4140
Luminous efficacy (lm / W)	129
CCT	3000K

CRI	90
N° LEDs / modulo	1

Light Emission Specifications

Emission type	Direct monoemission
Optics / diffuser / reflector type	Symmetrical optical lens
Optical / diffuser / reflector material	PMMA
Optical finish / diffuser / reflector	Semi-trasparent
Beam (°)	18
Rotation degrees (°)	350
Swivel degrees (°)	60

Electrical specifications

Power supply availability	Not included
Power supply position	Remote
Dimmer position	Remote
Power (W)	32
Power supply type (CC / CV)	Current
Nominal current (mA)	900
Insulation class	III
Light source type	LED COB

Dimensions and weight

Height / Thickness (mm)	105
Diameter (mm)	143
Recessed hole width (mm)	135

General conditions

Warranty	5 years
----------	---------


Accessory codes



81-04011
Driver 23W 500mA IND



81-04002
DRIVER2 0W 500 mA DALI/1-10V/PUSH



81-04092
Driver 500mA Wireless Bluetooth



81-04012
Driver 32W MAX 700mA IND



81-04044
Driver 26W 700mA PHASE CUT



81-02413
AL. EL. 26W 700mA DIP-SWITCH IND.



81-04066
Driver 1,4W 32W 700mA DIMM 1-10V PUSH



28-4896-30
Honeycomb



28-04878-16
Frame for multiple installation



28-04878-21
Frame for multiple installation