


PF15 LED 12W 30K 110°

Code: 3825-01-21

The ceiling light PF 15 combines the essential geometric shape of the square and an extremely shallow profile with COB LED sources of the last generation. PF15 can be installed on the ceiling or on the wall, in various settings such as hotels, public or private areas, including low ceilings. It is a good alternative to downlights, with low installation costs. The closing screen is made of opal polycarbonate with high light-diffusion capacity and it protrudes slightly from the product profile for an innovative luminous effect.

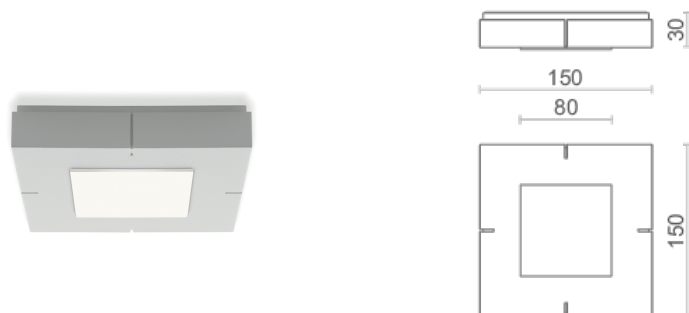

General specifications

Installation environment	Interior
Native mounting type	Surface mounted
Mounting type	Surface mountend
Ideal application locations	Residential, Hospitality, Showroom, Museum, Office, Commercial space
Packaging	Box
Made in	Italy

Physical specifications

Body color	White
Covering with insulating materials	No
IP	IP43
Waterstop	No
Salt mist resistance	No

Lighting specifications

N° of light sources	1
Lumen	1088
Power	12
Light type	White
CCT	3000K

Optical specifications

Emission type	Direct monoemission
Light beam distribution	Symmetric
Beam	110
Optics type	Symmetric beam diffuser
Optical diffuser finish	Opal

Electrical specifications

Dimmable	No
Dimming type	ON/OFF
Light source type	LED COB

Dimensions and weight

Length (mm)	150
Width (mm)	150
Height / Thickness (mm)	30

General conditions

Warranty	5 years
----------	----------------