


PERF COMP 26W 27K DKM DALI 20° NE

Code: 751-261CYDD-16

Spotlight for LKM 3-phase electrified tracks with Cut-Phase power supply, specially developed for high efficiency COB LEDs. Optical devices for better visual comfort are available.

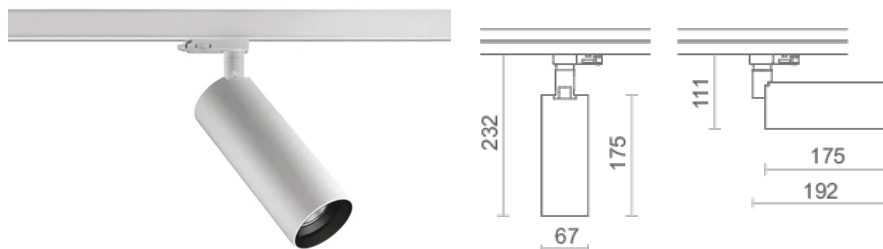

General specifications

Designer	Ivela Design Team
Installation environment	Interior
Native mounting type	Track mounted
Mounting type	Track attachment
Ideal application locations	Residential, Uffici
Made in	Italy

Physical specifications

Shape	Cylindrical
Body material	Aluminum
Body finish	Matte
Body color	Black
Frontal material	Aluminum
Frontal finish	Matte
Thermal dissipation	Passive
IP	IP20

Lighting specifications

N° of light sources	1
Lumen	2187
Power	26
W source	26
Light type	White

CCT	2700K
SDCM	3
Life time	L90B50
LB value @ h	50000
N° LEDs / modulo	1

Optical specifications

Emission type	Direct monoemission
Light beam distribution	Symmetric
Beam	20
Orientability	Adjustable

Electrical specifications

Dimmable	No
Dimming type	DALI 2 Dimming
Power supply type	Voltage
Input Voltage (V)	230
Frequency (Hz)	50-60
Light source type	LED COB

Dimensions and weight

Length (mm)	192
Height / Thickness (mm)	232
Diameter (mm)	67

General conditions

Warranty	5 years
----------	---------