


TRATTO BI-EMISSION

Code: TRB-2XS27BIL2

Only 15 mm wide for uncompromising lighting. Tratto combines an ultra-slim design with dual emission, delivering both direct and indirect light in a compact form. With minimal glare, it ensures visual comfort and excellent performance, seamlessly integrating into any environment.

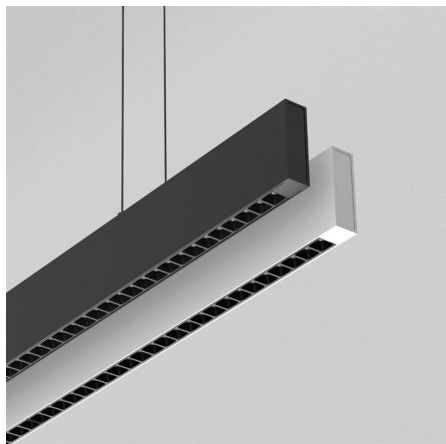

General specifications

Designer	Elcom Design Team
Product type	Linear lamp
Installation environment	Interior
Native mounting type	Suspension
Included mounting type	Suspension fixing
Susp. pendant length	2000
Mounting location	Ceiling
Made in	Italy

Physical specifications

Body material	Aluminum
Body finish	Powder-coated
Body color	White
Cap material	Plastic
Cap finish	Powder-coated
Cap color	White
IP back	IP20
IP	IP20

Lighting specifications

Lumen	1632
Lumen #2#	1142

Luminous efficacy (lm / W)	107
CCT	2700K
CCT	2700K
CRI	90
CRI #2#	90
Chromatic tolerance (SDCM)	3
RG	RG1
Life time	L90B10

Light Emission Specifications

Emission type	Biemission
Light emission side	Biemission
Light beam distribution	Symmetric
Optics / diffuser / reflector type	Symmetrical optical lens
Optical / diffuser / reflector material	PMMA
Optic / Diffuser Material (B)	Polycarbonate
Optical Finish / Diffuser (B)	Opal
Beam (°)	25x60

Electrical specifications

Power supply availability	Not included
Power supply position	Remote
Ignition type	Dual switch
Power (W)	25.9
Product downlight (W)	15.1
Power uplight (W)	10.8
Power supply voltage type	DC
Power supply type (CC / CV)	Current
Input Voltage MIN-MAX (V)	36
Nominal current (mA)	768
Insulation class	III
Light source type	LEDs SMD
Replaceable power supply system	Replaceable by skilled personnel
Replaceable light source	Replaceable by skilled personnel

Dimensions and weight

Length (mm)	1129
Width (mm)	15
Height / Thickness (mm)	50

Cable IN length (mm)	1000
Cable OUT length (mm)	1000

General conditions

Warranty	5 years
Operating temperature (ambient)	-10 °C (min) / 30 °C (max)
Storage temperature	-20 °C (min) / 50 °C (max)