


LIGHTING DATA

Lenght (mm)	Watt	lm ¹	CRI
1134	33	3440	90
1413	41,25	4300	90
1693	49,5	5160	90
1972	57,75	6020	90
2252	66	6880	90
2531	74,25	7740	90
2810	82,5	8600	90

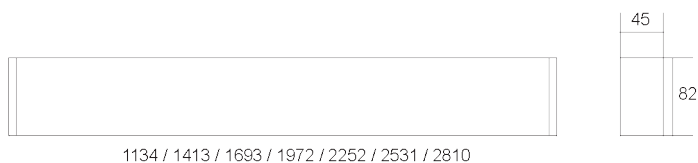

¹ Product real lumen based on CCT at 4000K

CODE / Complete the code + (1) + (2) + (3) + (4) + (5) + (6) + (7)



(1) Emission

1 mono
2 up/down



(2) Beam

O opal
P prismatic



(3) Installation

P Ceiling
S Suspension
R Trimless
E Wall
B Track



(4) CCT

27 2700K
30 3000K
40 4000K



(5) Colour

BI white
NE black



(6) Control


OO on/off
DA dali




(7) Dimension

L1 1134
L2 1413
L3 1693
L4 1972
L5 2252
L6 2531
L7 2810

(1) EMISSION




mono




up/down

(2) BEAM



opal



prismatic


(3) INSTALLATION




Ceiling



Suspension



Trimless




Wall



Track

(4) CCT



2700K 3000K 4000K

(5) COLOUR



white

black

(6) CONTROL

OO on/off
DA dali

(7) DIMENSION

L1 1134
L2 1413
L3 1693
L4 1972
L5 2252
L6 2531
L7 2810