STRIP BLACK 224LED/M 10W/M 30K IP65

Code: 06867

The Black stripLED Professional line is the best choice in terms of performance, efficiency and light quality. These strips are characterized by a uniform color andhigh color rendering, brilliant and sharp in every context. CRI95, R9>60.

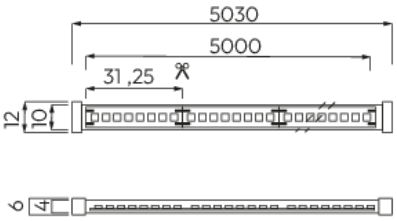

General specifications

Commercial brand	**Black professional**
Installation environment	**Interior, Exterior**
Included mounting type	**3M 300 LSE biadhesive**
Cable output type	**IN/OUT**
Packaging	**Box**
Made in	**Albania**

Physical specifications

IP	**IP65**

Lighting specifications

N° LEDs / m	**224**
Lm / m	**1427**
W / m	**10**
Light type	**White**
CCT	**3000K**
CRI	**95**
R9	**60**
Chromatic tolerance (SDCM)	**3**
RG	**RG1**
Life time	**L90B10**
LB value @ h	**50000**

Light Emission Specifications

Beam (°)	**120**

Electrical specifications

Power supply availability	**Not included**
Dimmable	**Yes**
Dimmer availability	**Not included**
Power (W)	**50**
Power supply voltage type	**DC**
Power supply type (CC / CV)	**Voltage**
Input Voltage MIN-MAX (V)	**24**
Insulation class	**III**
Light source type	**LEDs SMD**
LED packaging	**2835**
Feedback (mm)	**5000**
Energy efficiency class	
Replaceable light source	**Replaceable by skilled personnel**

Dimensions and weight

Length (mm)	**4988**
Width (mm)	**10**
Height / Thickness (mm)	**4**
Cable IN length (mm)	**100**
Cable OUT length (mm)	**100**
Minimum bending radius (m)	**5**
Module length (mm)	**31.25**

General conditions

Warranty	**2 years**
Operating temperature (ambient)	**-10°C (min) / 45°C (max)**
Storage temperature	**-20°C (min) / 50°C (max)**

Accessory codes



05187
Closed cap for silicone sheathing 9528



05188
Cable entry cap for silicone sheathing 9528